

# PRINTPRESS

## giugni



### STAMPA IN PIANO

La Printpress mod. 339 è una macchina per la stampa di qualità di piccole superfici. Stampa in piano con inchiostro liquido ad un colore, con prodotto fermo.

La stampa di qualità viene ottenuta con un gruppo di inchiostrazione flessografica motorizzata che va ad inchiostrare un cliché montato su carrello mobile. Il carrello ha un moto alternato orizzontale su guide ed è azionato da un cilindro pneumatico. Il cliché inchiostrato viene poi pressato da un altro cilindro pneumatico sul supporto da stampare.

Le superfici da stampare possono essere flessibili o rigide, assorbenti e non (es: etichette, film per prodotti medicali, ecc).


Il gruppo di inchiostrazione flessografica è facilmente smontabile per la pulizia. Logica funzionamento elettropneumatica programmabile.



### FLAT PRINTING

The Printpress mod. 339 is a machine for quality printing of small surfaces. Flat printing with one-colour liquid ink, with print substrate stationary. Quality printing is achieved with a motorised flexographic ink application unit which applies ink to a cliché mounted on a mobile carriage. This carriage has alternating horizontal movement on guides and is driven by a pneumatic cylinder. The ink-coated cliché is then pressed by another pneumatic cylinder onto the print substrate.

Printable surfaces can be flexible or rigid, absorbent or non-absorbent (labels, film for medical products, etc.). The flexographic ink application unit is easily removable for cleaning. Programmable electro-pneumatic operating logic.

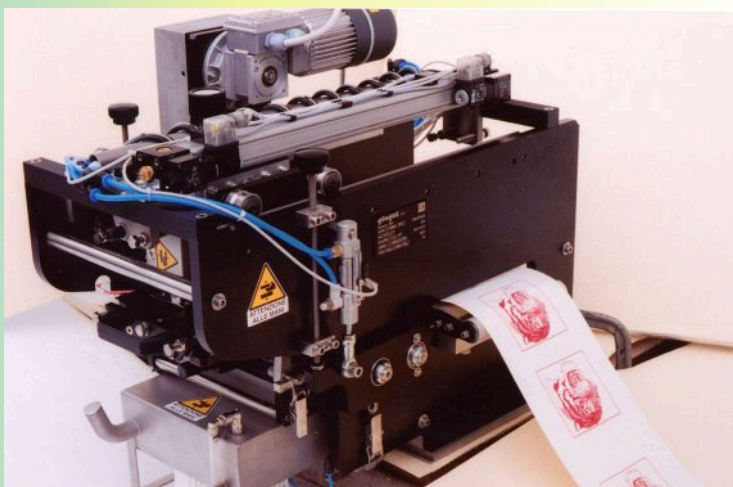

### CARATTERISTICHE TECNICHE

- Area max di stampa mm 150 x 150,
- Larghezza max film mm 190,
- Dimensioni indicative mm. 630x440x560,
- Peso indicativo kg 90 solo parte stampante,
- Potenzialità max. 40 cicli/min.

### TECHNICAL CHARACTERISTICS

- Max printig area mm. 150 x 150,
- Max film length mm 190,
- Approx.ions mm 630 x 440 x 560,
- Approximate weight of printing part 90 kg,
- Max. capacity 40 cycles/min.



**giugni**

